



## ALN-9627 "H" Inlay

**The Alien Technology® ALN-9627 "H" RFID inlay is a general purpose inlay for small tickets and hang tags.**



Powered by Alien®'s break-through **Higgs™3** UHF RFID IC and innovative "**H**" antenna design, the ALN-9627 delivers industry leading EPC Gen 2 performance in a form factor suitable for **small vertical labels and hang tags**, which makes it ideal for apparel and small label applications.

With its Higgs-3 core, the "**H**" delivers excellent performance and a rich feature set expanding the standard 32-bit TID with an **additional 64-bit Unique TID for authentication** and serialization applications, an **extensible EPC memory bank, 512-bits of user memory** for distributed data applications and **password protected read and write support capabilities** to prevent unauthorized viewing and modification of the tag's data.

ALN-9627 inlays are *World Tag* compliant, enabling consistent operation across the diverse frequencies of the Americas, Europe, Middle East, Asia, and Africa.

**Typical applications for the "H" include, but are not limited to:**


- apparel, hang tags
- corrugate cases
- small package labels
- shipping labels
- asset management
- file folder labels

### **FEATURES**


- Exceptional performance
- EPC Gen 2 (v1.2.0) compliant
- ISO/IEC 18000-6C compliant
- Worldwide RFID UHF operation (840-960MHz)
- Higgs™-3 IC with 800-bits of Nonvolatile Memory
  - 32-bit TID
  - 64-bit Unique TID
  - 96-bit EPC Memory, extensible to 480-bits
  - 512-bit User Memory
  - 32-bit Access password
  - 32-bit Kill password
- Pre-programmed with a unique, unalterable 64-bit serial number (ideal for authentication)
- User Memory can be Block Perma-Locked
- User Memory can be Read Password protected in 64-bit blocks, prohibiting unintended Reads without an access password
- Supports all Mandatory and Optional Gen 2 commands including item level commands
- Custom commands for high speed programming
- Available in high-yield, high-capacity dry/wet inlay rolls for high volume converting processes

# ALN-9627 "H" Inlay

## ALN-9627 Inlay Orientation

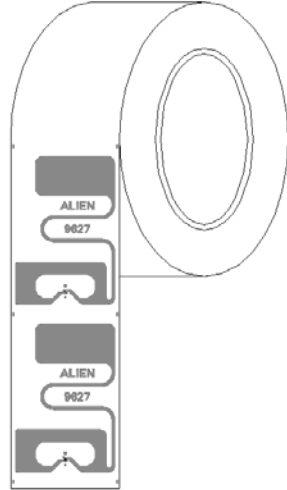


**ALN-9627-FSR**  
(Dry Unslit Roll)

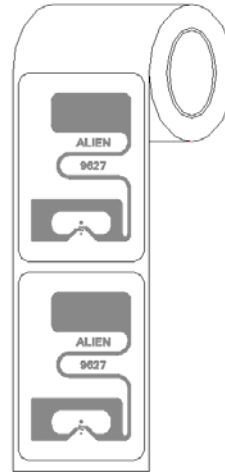


**ALN-9627-FWRW**  
(White Wet Roll)

Standard Alien Inlay rolls unwind with metal antenna side facing outward with respect to the core.

## ALN-9627 Inlay Specification

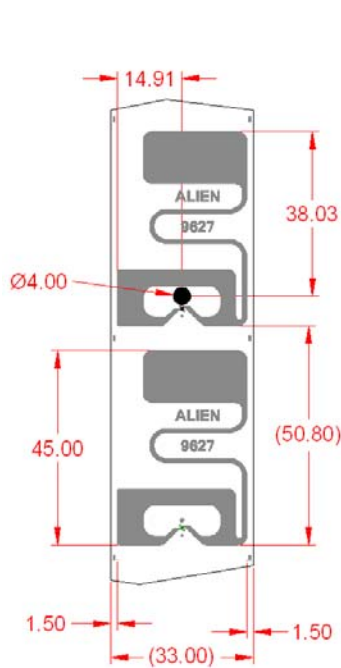

**ALN-9627-FSR**  
(Dry Unslit Inlay)

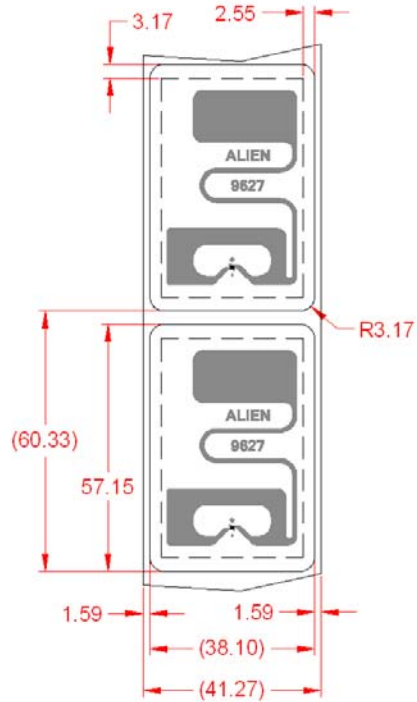

**ALN-9627-FWRW**  
(White Wet Inlay)



# ALN-9627 "H" Inlay


## ALN-9627 Inlay Stackup

DRY INLAY THICKNESS, ±10%	
OVER ANTENNA	0.05 mm
OVER CHIP	0.25 mm

WHITE WET INLAY THICKNESS, ±10%	
OVER ANTENNA	0.16 mm
OVER CHIP	0.36 mm




**ALN-9627-FSR**  
(Dry Unslit Inlay)

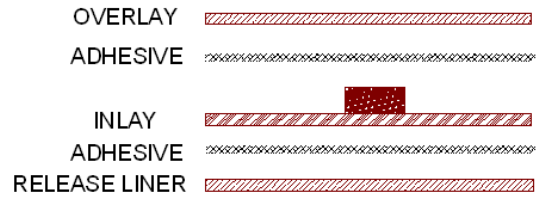


**ALN-9627-FWRW**  
(White Wet Inlay)

## ALN-9627 Inlay Angular Sensitivity

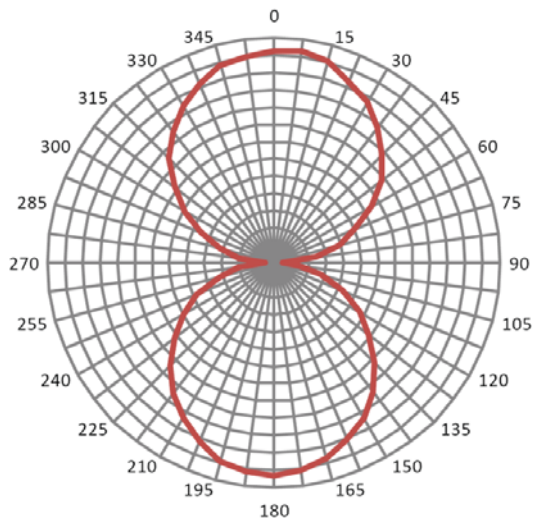

Angular Sensitivity  
(Relative Read Range vs. Orientation)

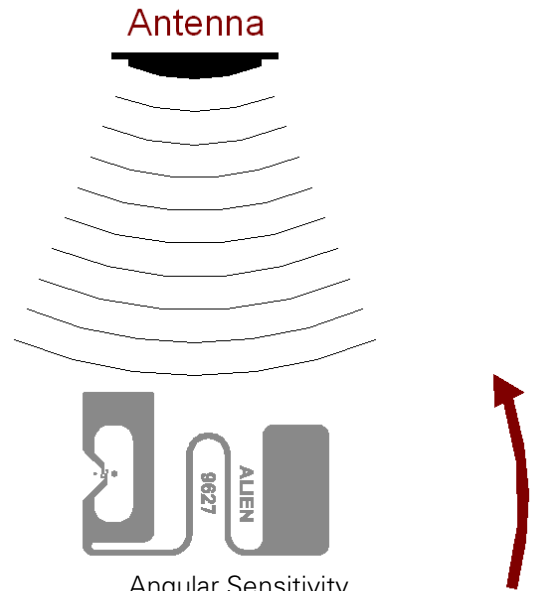

Angular Sensitivity  
Inlay is rotated in the x, y, plane about the z axis  
(tag shown at 0° with respect to face of antenna)

## ALN-9627 “H” Inlay

### ALN-9627 Specifications

#### Dry Inlay

Antenna Width	1.18" [30.0mm]
Antenna Length	1.77" [45.0 mm]
Web Width (FSR)	1.30" [33.0mm]
Web Pitch	2.00" [50.8mm]
Core Width (FSR)	1.30" [33.0mm]
Core ID	6" [152.4mm]
Core Material	Fiberboard
Interleaf Material	N/A
Interleaf Width	N/A
Inlays per Roll	8,000 Nominal
Maximum Roll OD	< 12" [304.8mm]
Roll Labeling Data	Roll #, Quantity

#### Wet Inlay

Inlay Width	1.5" [38.1mm]
Inlay Length	2.25" [57.15mm]
Web Width (FWRW)	1.625" [41.27 mm]
Web Pitch	2.375" [60.33]
Core Width	1.625" [41.27mm]
Core ID	3" [76.2mm]
Core Material	Fiberboard
Inlays per Roll	2,000 Nominal
Maximum Roll OD	< 16" [406.4mm]
Roll Labeling Data	Roll #, Quantity
White (-FWRW)	TT Printable Paper
Overlay Adhesive (-FWRW)	General Purpose Permanent
Inlay Adhesive	General Purpose Permanent
Adhesive Application Temperature	> +36.5°F [+2°C]
Adhesive Service Temperature	-4°F to +199.4°F [-20°C to +93°C]
Release Liner	40# SCK

#### Environmental

Shelf Life	2 Years at +77°F [+25°C] @ 40%RH
Recommended Storage	+77°F [+25°C] @ 40% RH -13°F to 122°F [-25°C to +50°C] 20% to 90% RH Non-condensing
Storage Limits	-40°F to +158°F [-40°C to +70°C] 20% to 90% RH Non-condensing
Operating Limits	> 1.97" [50mm]
Bend Diameter	< 5N/mm <sup>2</sup>
Pressure	Per ASTM D5276
Drop Resistance	100,000 at 25°C
Write Cycles	2002/95/EC Compliant
RoHs	> 5.0kV / > 1.5kV
ESD – HBM / CDM	

#### RFID

ISO/IEC 18000-6C	
EPCglobal Class 1 Gen 2	
Integrated Circuit	Alien Higgs-3
EPCglobal Certificate	950110126000001084
Operating Frequency	840–960 MHz
EPC Size	96 - 480 Bits
User Memory	512 Bits
TID	32 Bits
Unique TID	64 Bits
Access Password	32 Bits
Kill Password	32 Bits



Copyright © 2011 Alien Technology Corporation

All rights reserved. Alien, Alien Technology, the Alien Technology logo, FSA™, Alien Higgs-3, Squiggle, and the Squiggle logo are trademarks or registered trademarks of Alien Technology Corporation in the U.S. and other countries.

**HANDLING PRECAUTIONS** Observe standard handling practices to minimize ESD.

**DISCLAIMER** Application recommendations are guidelines only - actual results may vary and should be confirmed. This is a general purpose product not designed or intended for any specific application.

Alien Technology  
18220 Butterfield Blvd.  
Morgan Hill, CA 95037  
866-RFID NOW  
www.alientechnology.com